

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Govee

**Supplier's address:** Chen Bing, 1st Floor Newmarket House, Newmarket Square, The Coombe, Dublin 8, DUBLIN, Ireland, D08VAP9

**Model identifier:** H6078

## Type of light source:

|   |              |                                 |                            |
|---|--------------|---------------------------------|----------------------------|
| Lighting technology used:                           | LED          | Non-directional or directional: | NDLS                       |
| Light source cap-type (or other electric interface) | DC connector |                                 |                            |
| Mains or non-mains:                                 | MLS          | Connected light source (CLS):   | Yes                        |
| Colour-tuneable light source:                       | Yes          | Envelope:                       | -                          |
| High luminance light source:                        | No           |                                 |                            |
| Anti-glare shield:                                  | No           | Dimmable:                       | Only with specific dimmers |


## Product parameters

| Parameter  | Value                  | Parameter  | Value                              |
|--|------------------------|--|------------------------------------|
| <b>General product parameters:</b>   |                        |  |                                    |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 24                     | Energy efficiency class  | G                                  |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 500 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2200...6500                        |
| On-mode power ( $P_{on}$ ), expressed in W   | 24,0                   | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | -                                  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 80                                 |
| Outer dimensions without separate con-   | Height                 | 575  | Spectral power distribution in the |
|  | Width                  | 80   |                                    |
|  | Depth                  | 80   |                                    |
|  |                        |  | See image in last page             |

|   |      |  |                                       |                |
|---|------|--|---------------------------------------|----------------|
| trol gear, lighting control parts and non-lighting control parts, if any (millimetre)                                   |      |  | range 250 nm to 800 nm, at full-load  |                |
| Claim of equivalent power <sup>(a)</sup>  | -    |  | If yes, equivalent power (W)          | -              |
|   |      |  | Chromaticity coordinates (x and y)    | 0,502<br>0,415 |
| <b>Parameters for LED and OLED light sources:</b>   |      |  |                                       |                |
| R9 colour rendering index value   | 10   |  | Survival factor                       | 1,00           |
| the lumen maintenance factor  | 0,95 |  |                                       |                |
| <b>Parameters for LED and OLED mains light sources:</b>   |      |  |                                       |                |
| displacement factor (cos $\phi_1$ )   | 0,90 |  | Colour consistency in McAdam ellipses | 3              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | _(b) |  | If yes then replacement claim (W)     | -              |
| Flicker metric (Pst LM)   | 0,1  |  | Stroboscopic effect metric (SVM)      | -              |

(a) : not applicable;

(b) : not applicable;

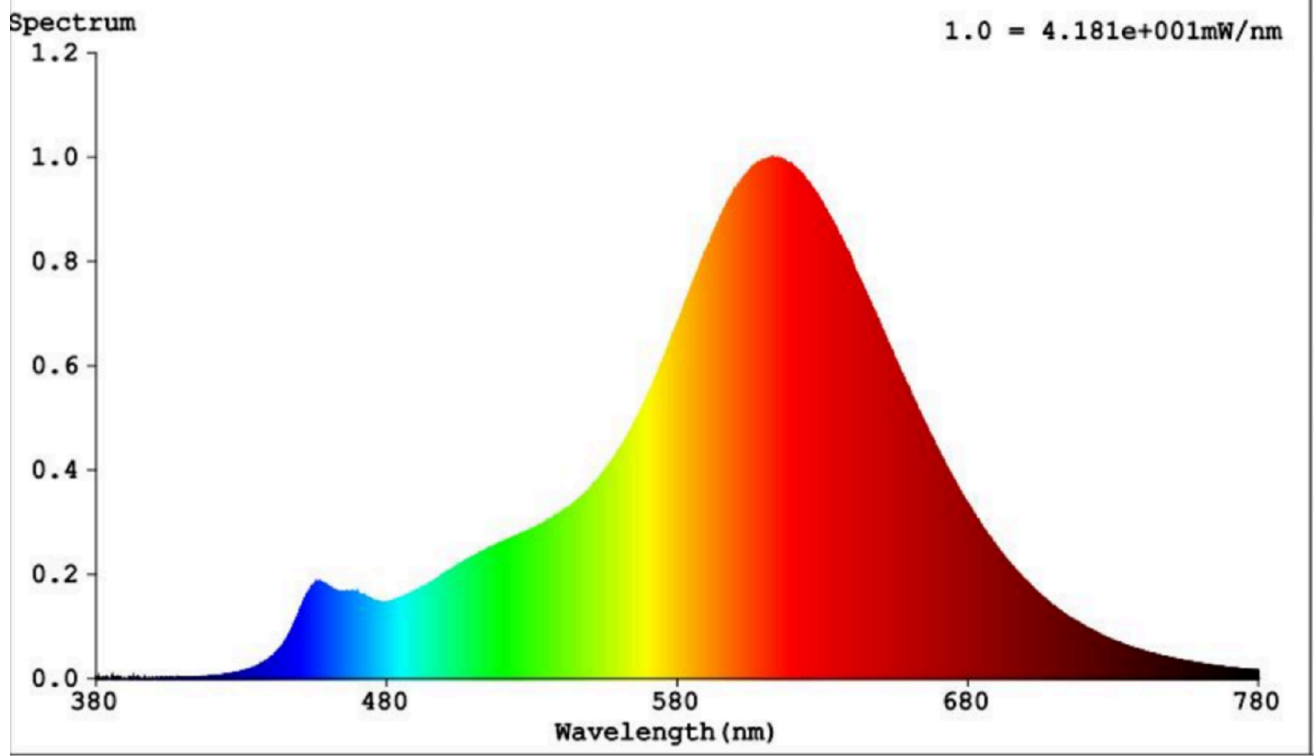

Model placed on the Union market from 27/09/2023



**EPREL registration number:** 1783948

<https://eprel.ec.europa.eu/qr/1783948>

**Supplier:** GOVEE MOMENTS (DE) HANDEL GmbH (Authorised representative)

**Website:**

**Customer care service:**

**Name:** Chen Bing

**Website:** [1st Floor Newmarket House, Newmarket Square, The Coombe, Dublin 8, DUBLIN, Ireland, D08VAP9](#)

**Email:** [info@sunrisemoments.com](mailto:info@sunrisemoments.com)

**Phone:** +35314169660

**Address:**

1st Floor Newmarket House, Newmarket Square, The Coombe, Dublin 8, DUBLIN, Ireland, D08VAP9