

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: meross

Supplier's address: CET PRODUCT SERVICE SP. Z O.O., Ul. Długa 33 102, 95-100 Zgierz, PL

Model identifier: MSL430

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	/		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	364 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	99	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	99	
	Depth	196	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	6
		Chromaticity coordinates (x and y)	0,318 0,344
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 008	Beam angle in degrees, or the range of beam angles that can be set	180
Parameters for LED and OLED light sources:			
R9 colour rendering index value	19	Survival factor	1,00
the lumen maintenance factor	0,97		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;


(b) '-': not applicable;

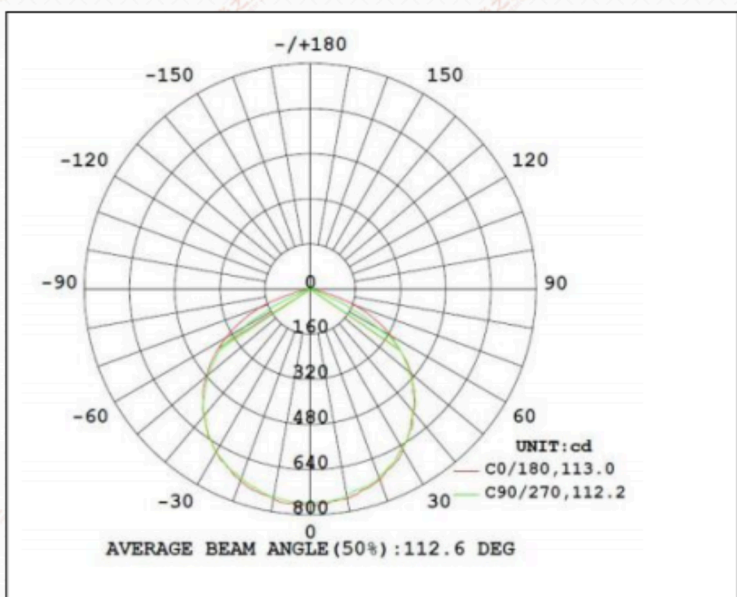

Luminous Intensity Distribution Diagram
Spectral power distribution

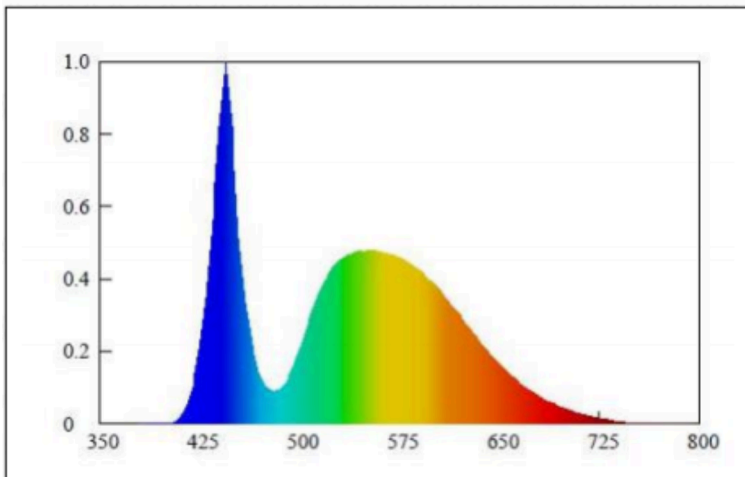

Model placed on the Union market from 26/01/2022



EPREL registration number: 1140064

<https://eprel.ec.europa.eu/qr/1140064>

Supplier: CET PRODUCT SERVICE SP. Z O.O. (Authorised representative)

Website: <https://www.cetproduct.com/blank-10>

Customer care service:

Name: CET PRODUCT SERVICE SP. Z O.O.

Website:

Email: info.cetservice@gmail.com

Phone: +4971416432251

Address:

Ul. Długa 33 102
95-100 Zgierz
Poland